

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/053043 A1

(51) International Patent Classification⁷: **H01L 33/00**

(21) International Application Number:
PCT/KR2004/003045

(22) International Filing Date:
24 November 2004 (24.11.2004)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2003-0084173
25 November 2003 (25.11.2003) KR

(71) Applicant (for all designated States except US): SSI
[KR/KR]; 594-1 Seongbon-ri, Daeso-myun, Eum-
seong-gun, Chungcheongbuk-do 369-823 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): PARK, Jun-Kyu
[KR/KR]; 721-602 Solgeo Apt., Sanbon-dong, Gunpo-city,
Kyungki-do 435-040 (KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: MANUFACTURING METHOD FOR WHITE LIGHT EMITTING DIODE DEVICE INCLUDING TWO STEP CURE
PROCESS

TEMPERATURE

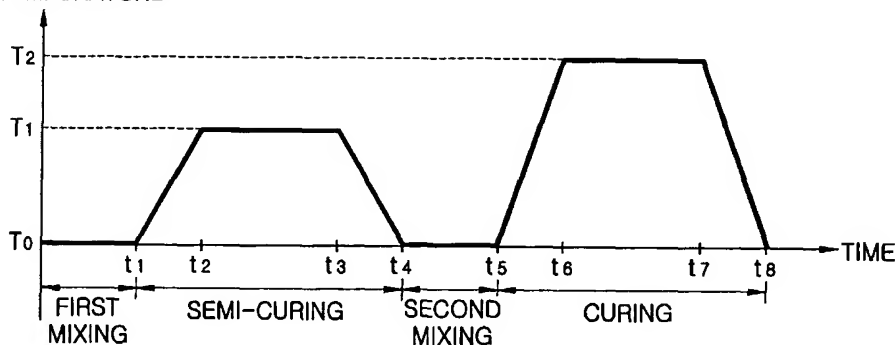

(57) Abstract: Provided is a method of manufacturing a light emitting diode (LED) device which has excellent optical properties. The method includes: mixing a main gradient with a curing agent at room temperature to obtain the liquid epoxy resin; semi-curing the liquid epoxy resin at 70-1000°C under 1-30 torr; adding a phosphor to the semi-cured liquid epoxy resin at room temperature and mixing the phosphor and the semi-cured liquid epoxy resin to obtain a

mother resin mixed with the phosphor; feeding the obtained product into an element to be molded comprising a LED chip; and completely curing the mother resin at 120°C or higher under an ambient pressure.



WO 2005/053043 A1

MANUFACTURING METHOD FOR WHITE LIGHT EMITTING DIODE DEVICE INCLUDING TWO STEP CURE PROCESS

TECHNICAL FIELD

The present invention relates to a method of manufacturing a light emitting diode (LED) device, and more particularly to, a method of manufacturing a white LED device using a liquid epoxy resin.

BACKGROUND ART

The ranges of applications in which white LED devices are used continue to increase. White LED devices are used in backlight elements of various apparatuses including display devices, lighting products, and various signal displays, etc. When the phosphors of white LED devices are exposed to blue light (a wavelength of about 440-475 nm) or UV light (a wavelength of about 350-410 nm) emitted from blue or UV light LED chips, they change the incident blue or UV light to longer wavelength light, and thus, the white LED devices emit white light outward.

A phosphor (fluorescent pigment) changes UV light or blue light to light having a wavelength different than the UV light or blue light. The phosphor is generally dispersed in an epoxy resin for molding used to protect LED chips and a dispersion state of the phosphor in the epoxy resin has a great effect on characteristics of a white LED device, such as, luminous intensity, color distribution, and reliability of white LED devices. That is, to obtain a white LED device having excellent quality, the phosphor must be uniformly dispersed in the epoxy resin.

However, while an epoxy resin has a specific gravity of about 1.1-1.5, a phosphor has a specific gravity of about 3.8-6.0. Thus, when the phosphor is added to the epoxy resin, the phosphor settles in the epoxy resin due to the difference between their specific gravities. This difference in the specific gravity is an obstacle to obtaining white LED devices having excellent optical properties by uniformly dispersing the phosphor in the epoxy resin.

Further, the epoxy resin is subjected to a curing process in which the epoxy resin is heated and cured, and the viscosity of the epoxy resin decreases at the beginning of the curing process and gradually increases until the epoxy resin is cured. The

phosphor is more likely to settle at the beginning of the curing process since the phosphor settles faster for lower viscosities of the epoxy resin.

To obtain white LED devices having excellent optical qualities, the settlement of the phosphor at the beginning of the curing process due to a decrease in the viscosity of the liquid epoxy resin must be prevented or suppressed.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a graph illustrating a thermal budget applied to an epoxy resin in a method of manufacturing a white LED device comprising a two-step curing process according to an embodiment of the present invention;

FIG. 2 is a schematic cross-sectional view of a white LED lamp manufactured according to an embodiment of the present invention;

FIG. 3 is a schematic cross-sectional view of a white LED chip manufactured according to an embodiment of the present invention;

FIG. 4 is a schematic cross-sectional view of a white LED chip including an injection mold housing package according to an embodiment of the present invention; and

FIG. 5 is a viscosity vs. time graph of liquid epoxy resins during a complete curing process according to an embodiment of the present invention and during a one-step curing process according to a conventional method.

DETAILED DESCRIPTION OF THE INVENTION

Technical Goal of the Invention

The present invention provides a method of manufacturing a white light emitting diode (LED) device which has high luminous intensity and reliability and low color distribution variation by uniformly dispersing a phosphor in an epoxy resin.

The present invention also provides a method of manufacturing a white LED device with low production costs in a simplified process.

Disclosure of the Invention

According to an embodiment of the present invention, there is provided a method of manufacturing a white LED device comprising a two-step curing process. In the present method, a liquid epoxy resin is semi-cured before completely curing a mixture

of the liquid epoxy resin and a phosphor. Since the semi-curing is performed, settlement of the phosphor, etc. can be prevented during the complete curing process. Thus, a white LED device having the phosphor uniformly dispersed in the epoxy resin can be manufactured using this method. The characteristics of the present invention
5 can be accomplished by previously semi-curing the liquid epoxy resin before completely curing the mixture of a liquid epoxy resin and a phosphor, thereby attenuating the effect of the viscosity of the epoxy resin being decreased at the beginning of the complete curing process.

According to an exemplary embodiment of the present invention, first, a main
10 gradient and a curing agent is subjected to a first mixing at room temperature to obtain a liquid epoxy resin. The epoxy resin may or may not comprise a phosphor. Then, the liquid epoxy resin is semi-cured at 70-100°C under low pressure, for example, 1-30 torr, and then, the temperature is lowered to room temperature. A phosphor is added to the semi-cured liquid epoxy resin and is subjected to a second mixing to obtain a
15 mother resin mixed with the phosphor. The addition of the phosphor to the semi-cured liquid epoxy resin can be omitted when a sufficient amount of phosphor is added to the liquid epoxy resin in the first mixing. Subsequently, the obtained product is fed into an element to be molded comprising an LED chip, and then, the mother resin is completely cured at 120°C or higher under an ambient pressure. In the complete curing process,
20 the mother resin is completely cured. Little decrease in viscosity of the epoxy resin occurs at the beginning of the complete curing process, and thus, the phosphor can be uniformly dispersed in the mother resin. After the complete curing of the mother resin, a white LED device is obtained.

The feeding of the mother resin may be performed by a potting method or a
25 screen pattern masking method.

The main gradient may be cresol novolac epoxy, phenol novolac epoxy, bisphenol A epoxy, or a mixture thereof. The curing agent may be an acid anhydride, a modified aromatic amine, phenol novolac epoxy, or a mixture thereof.

30 Effect of the Invention

In a method of manufacturing a white LED device according to an embodiment of the present invention, a liquid epoxy resin is aged and semi-cured before a complete curing process, and thus, its viscosity does not greatly decrease in the complete curing

process. The aged and semi-cured liquid resin may be cured at a high temperature in a short time. Thus, a phosphor, which has higher specific gravity than the epoxy resin, does not settle during the complete curing process. Since the phosphor can be uniformly dispersed in the cured epoxy resin, variance of its color distribution is low, thereby producing a white LED which has excellent manufacturing reproducibility.

According to an embodiment of the present invention, the complete curing process, which is performed at a relatively high temperature, can be performed in a shorter time than a conventional method, and thus, the lifetime of the white LED device can be increased. Further, since unnecessary additives such as a silicone resin are not required, the white LED device can be manufactured at low production costs.

BEST MODE FOR CARRYING OUT THE INVENTION

The above and other features and advantages of the present invention will become more apparent by describing in detail exemplary embodiments thereof with reference to the attached drawings. However, the invention is not limited to these embodiments, but can be realized in various forms. These embodiments are given for the purpose of illustration and scope of the present invention will be defined by the claims. Like reference numerals in the drawings denote like elements.

FIG. 1 is a graph illustrating a thermal budget applied to an epoxy resin in a method of manufacturing a white LED device comprising a two-step curing process according to an embodiment of the present invention.

Referring to FIG. 1, first, a main gradient and a curing agent are subjected to a first mixing to obtain a liquid epoxy resin. A phosphor may be added in the first mixing process.

The phosphor is a material which adsorbs UV light or blue light and emits light having a longer wavelength than the incident UV light or blue light. The type of the phosphor is not specifically limited. The phosphor may be a conventional phosphor. In the present embodiment, a silicone resin or EMC powder is not added during the first mixing process. Examples of the main gradient include cresol novolac epoxy, phenol novolac epoxy, bisphenol A epoxy, or a mixture thereof.

Examples of the curing agent include an acid anhydride, a modified aromatic amine, phenol novolac epoxy, or a mixture thereof. If necessary, a curing accelerator,

such as an imidazole compound or an amine compound, can be further added in the mixing to accelerate the curing reaction.

Subsequently, the liquid epoxy resin mixture is semi-cured. As illustrated in FIG. 1, the semi-curing process is performed at a predetermined temperature (T_1) for a predetermined time (t_4-t_1). The temperature and duration of the semi-curing are dependent on each other, and particularly, the time required to heat the epoxy resin mixture to the temperature (T_1) can vary according to the type or temperature of the liquid epoxy resin. For example, if the temperature (T_1) is about 80-100°C, a time for raising the temperature (t_2-t_1) may be about 30 minutes, a time (t_3-t_2) during which the liquid epoxy resin is maintained at the temperature (T_1) may be about 1-2 hours, and a time for lowering the temperature (t_4-t_3) may be about 30 minutes. T_0 denotes room temperature. The semi-curing process is performed under low pressure in order to prevent foam from occurring in a final product. The pressure may be, for example, about 1-30 torr. In the semi-curing, the liquid epoxy resin is aged to a semi-cured liquid epoxy resin.

The semi-cured liquid epoxy resin is then subjected to a second mixing to obtain a mother resin. The second mixing process is performed such that the constituents of the semi-cured liquid epoxy resin are intimately mixed. When a phosphor is added in the first mixing process, the phosphor is also intimately mixed during the second mixing process.

The phosphor may be further added to the semi-cured liquid epoxy resin in the second mixing process. The second mixing is performed at room temperature and the second mixing time (t_5-t_4) is not specifically limited.

The concentration of the phosphor in the mother resin can vary according to the characteristics of the white LED device desired. For example, the final concentration of the phosphor may be about 2.0-25% by weight based on the weight of the mother resin. The luminous intensity and wavelength of white light emitted from the white LED chip can be controlled by adjusting the weight ratio of the phosphor and the mother resin.

Next, a white LED chip is molded and cast using the resultant mother resin. The molding and casting of the LED chip 14 can be performed using a variety of methods. Representative methods are illustrated in FIGS. 2 through 4, in which a white LED device has a conventional structure. The LED chip 14 is bonded to a chip

support (not shown), a lead frame or substrate 22 with a silver adhesive 16 and is electrically connected to a connection pad or lead 22 via a bonding wire 18 using a conventional method. The present invention is characterized in that an epoxy resin used in the molding and casting process is the aged and semi-cured epoxy resin, unlike
5 the conventional method.

FIG. 2 is a schematic cross-sectional view of a white LED lamp manufactured according to an embodiment of the present invention. Referring to FIG. 2, after an LED chip 14 bonded to a chip support (not shown) formed in a groove shape in the upper portion of an electrode and a reflective plate portion 20 with a silver adhesive 16
10 is electrically connected via a bonding wire 18, molding is performed by potting a mother resin 10 mixed with a phosphor 12 to the upper portion to the LED chip 14. An external shape of the white LED lamp is cast using a mold cup 26.

FIG. 3 is a schematic cross-sectional view of a white LED device in the form of a chip manufactured according to an embodiment of the present invention. FIG. 4 is a
15 schematic cross-sectional view of a white LED device in the form of a chip including an injection mold housing package manufactured according to an embodiment of the present invention. Referring to FIGS. 3 and 4, the white LED device in the form of a chip is formed by casting a LED chip 14 mounted on a lead frame or substrate 22 using a screen pattern metal mask.

Referring to FIGS. 2 through 4, after molding the LED chip 14 using the semi-cured mother resin 10 mixed with the phosphor 12, the resultant product is completely cured. In the complete curing process, the semi-cured mother resin 10 is completely cured. The complete curing may be performed under an atmospheric pressure, unlike the semi-curing process. The complete curing is performed at a
20 temperature (T_2) greater than the semi-curing temperature (T_1) for a predetermined time (t_8-t_5). For example, the complete curing process may be performed at about 120-130°C for about 1-2 hours. More specifically, the complete curing process may comprise raising the temperature for about 30 minutes (t_6-t_5), maintaining the semi-cured mother resin 10 at about 130°C for about 1 hour (t_7-t_6), and lowering the
25 temperature for about 30 minutes (t_8-t_7). Like in the semi-curing process, the temperature and time of the complete curing are dependent on each other, and particularly, the time during which the temperature (T_2) is maintained can vary
30

according to the type or temperature of the liquid epoxy resin and a thermal budget in the semi-curing process.

FIG. 5 is a viscosity vs. time graph of liquid epoxy resins during a complete curing process according to an embodiment of the present invention and during a one-step curing process according to a conventional method. In both cases, the heating temperatures (T_2) during curing are identical. Referring to FIG. 5, when a mixture of the semi-cured mother resin 10 and the phosphor 12 is completely cured after the semi-curing process according to an embodiment of the present invention, a decrease in the viscosity of the liquid epoxy resin at the beginning of the complete curing process (designated by a solid line) is remarkably lower than that of the liquid epoxy resin at the beginning of the one-step curing process according to the conventional method (designated by a dotted line). Accordingly, according to the present invention, the phenomenon that the phosphor, which has higher specific gravity than the epoxy resin, settles during the curing process can be remarkably suppressed. Thus, the phosphor can be uniformly dispersed in the mother resin.

After the complete curing process, the mother resin 10 mixed with the phosphor 12 is completely cured, and elements for casting, etc. are removed from the resultant product, thereby obtaining one of the white LED devices illustrated in FIGS. 2 through 4.

The obtained white LED device is tested for color coordinate and luminous intensity and classified according to the measured values, and then, is wound on a ring using automated equipment and shipped.

The white LED device manufactured according to an embodiment of the present invention is used in displays of apparatuses emitting white light for electronic products, such as portable wireless communication apparatuses, automobiles, and electric home appliances, etc. or for backlights of liquid crystal displays, etc., as well as for all kinds of apparatuses in which a white LED device is used, for example, fluorescent lamps.

CLAIMS

1. A method of manufacturing a white light emitting diode (LED) device using a liquid epoxy resin, comprising:

5 mixing a main gradient with a curing agent at room temperature to obtain the liquid epoxy resin;

semi-curing the liquid epoxy resin at 70-1000°C under 1-30 torr;

10 adding a phosphor to the semi-cured liquid epoxy resin at room temperature and mixing the phosphor and the semi-cured liquid epoxy resin to obtain a mother resin mixed with the phosphor;

feeding the obtained product into an element to be molded comprising a LED chip; and

15 completely curing the mother resin at 120°C or higher under an ambient pressure.

2. The method of claim 1, wherein the feeding the mother resin is performed using a potting method or a screen pattern masking method.

20 3. The method of claim 1, wherein the main gradient is cresol novolac epoxy, phenol novolac epoxy, bisphenol A epoxy, or a mixture thereof and the curing agent is an acid anhydride, a modified aromatic amine, phenol novolac epoxy, or a mixture thereof.

25 4. The method of claim 1, wherein a phosphor is further added during the mixing of the main gradient with the curing agent.

1/3

FIG. 1


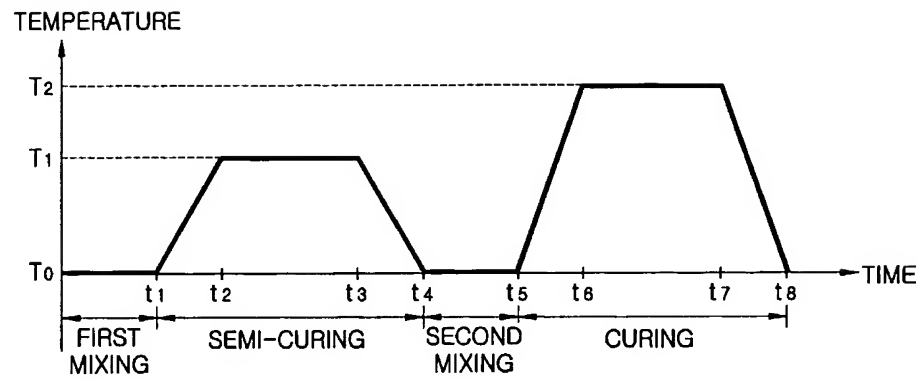


FIG. 2

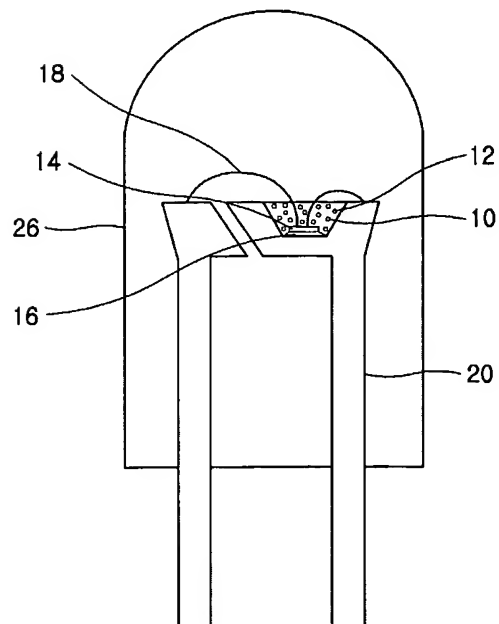

2/3

FIG. 3



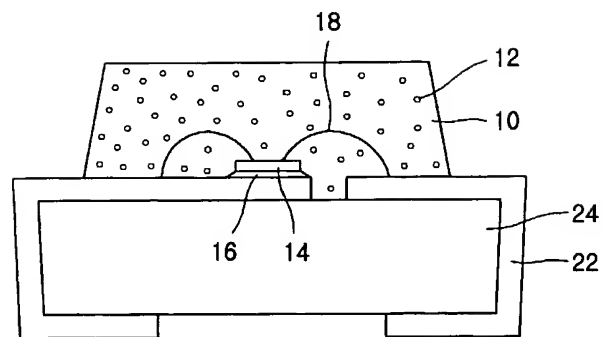


FIG. 4

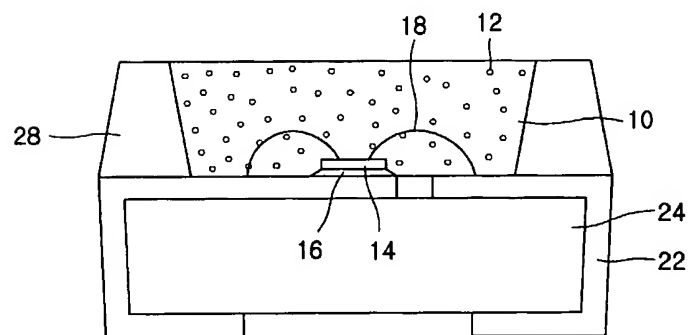

3/3

FIG. 5

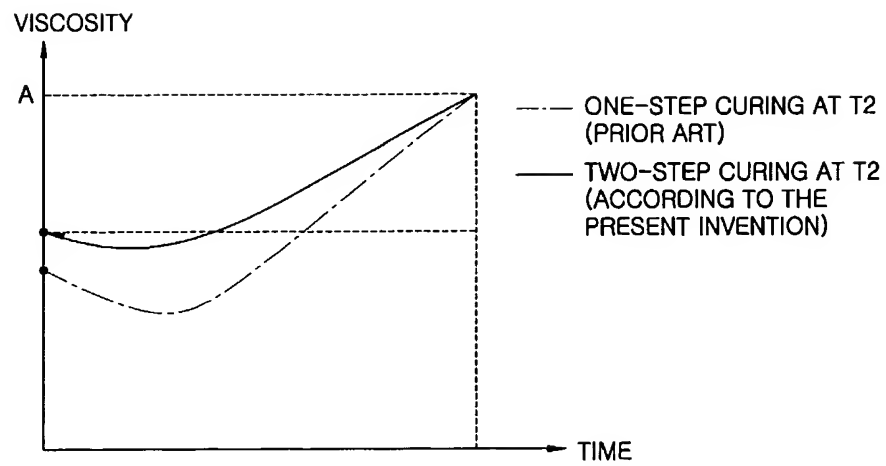

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2004/003045

A. CLASSIFICATION OF SUBJECT MATTER**IPC7 H01L 33/00**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and applications for inventions since 1975

Korean Utility models and applications for Utility models since 1975

Japanese Utility models and application for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/059982 A1 (NICHIA CORPORATION) 1 AUGUST 2002 see page 26. line 14 - page 26. line 19 & page 23 line 15 - page 26 line 2	1-4
A	US 6482664 B1 (JEONG-HOON LEE) 19 NOVEMBER 2002 see the whole document	1-4
A	US 6066861 (SIEMENS AKTIENGESELLSCHAFT) 23 MAY 2000 see the whole document	1-4
A	JP 2001-123045 A (SUMITOMO BAKELITE CO. LTD.) 8 MAY 2001 see the whole document	1-4

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 FEBRUARY 2005 (25.02.2005)

Date of mailing of the international search report

25 FEBRUARY 2005 (25.02.2005)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Dong Yup

Telephone No. 82-42-481-5749



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2004/003045

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 02/059982 A1	01.08.2002	US 2003080341 AA	01.05.2003
		JP 3428597 B2	22.07.2003
		JP 2003179269 A2	27.06.2003
		EP 1357610 A1	29.10.2003
		CN 1455960 T	12.11.2003
		JP 2003176334 A2	24.06.2003
		JP 3417415 B1	16.06.2003
		TW 554547 B	21.09.2003
US 6482664 B1	19.11.2002	JP 2002076444 A2	15.03.2002
		TW 459403 B	11.10.2001
US 6066861	23.05.2000	US 6277301 BA	21.08.2001
		CN 1228873 A	15.09.1999
		DE 19638667 A1	02.04.1998
		DE 29724284 U1	26.10.2000
		DE 29724382 U1	21.12.2000
		DE 19638667 C2	17.05.2001
		DE 59711671 C0	01.07.2004
		WO 9750132 A1	31.12.1997
		WO 9812757 A1	26.03.1998
		US 6277301 BA	21.08.2001
		US 6245259 BA	12.06.2001
		US 6613247 BA	02.09.2003
		US 6592780 BB	15.07.2003
		JP 11500584T2	12.01.1999
		JP 2000236112 A2	29.08.2000
		JP 2002208733 A2	26.07.2002
		JP 2002249769 A2	06.09.2002
		JP 2002317178 A2	31.10.2002
JP 2001-123045 A	08.05.2001	NONE	